

# Lab 4 - Working With Behaviors



**Spring 2019**

Michael Benjamin, mikerb@mit.edu  
Henrik Schmidt, henrik@mit.edu  
Department of Mechanical Engineering  
MIT, Cambridge MA 02139

---

<b>1 Overview and Objectives</b>	<b>3</b>
1.1 Preliminaries . . . . .	3
<b>2 Exercises</b>	<b>4</b>
2.1 Exercise 1 - Changing the Alpha Mission to Use the Loiter Behavior . . . . .	4
2.2 Exercise 2 - Adding Depth to our Missions, Constant Depth Behavior . . . . .	6
2.3 Exercise 3 - Allow the User to Dynamically Change Depth . . . . .	9
2.4 Exercise 4 - Use a Script to Randomly Change Depth . . . . .	11
2.5 Exercise 5 - Use the MaxDepth Behavior to Limit Depth . . . . .	12
2.6 Exercise 6 - Simulate Surfacing for GPS . . . . .	13
2.7 Exercise 7 - Add Simulated Drift to the Mission . . . . .	14
<b>3 Where to Find the Solutions</b>	<b>15</b>

---



# 1 Overview and Objectives

This lab will provide further experience with the IvP Helm to new users. It assumes some experience with the Helm, editing mission and behavior files, from the previous lab. It also assumes access to the corresponding lecture and lab overview lecture.

- The Loiter Behavior
- Simulating UUVs (adding depth to the simulations)
- The Timer Behavior
- The Behavior updates parameter
- Constant Depth behavior
- MaxDepth behavior
- Simulated Drift

## 1.1 Preliminaries

This lab assumes you have a working MOOS-IvP tree checked out and built on your computer. To verify this make sure that the following executables are built and findable in your shell path:

```
$ which MOOSDB
/Users/you/moos-ivp/bin/MOOSDB
$ which pHelmIvP
/Users/you/moos-ivp/bin/pHelmIvP
```

If unsuccessful with the above, return to the steps in the first lab and proceed until you are able to run the `s1_alpha` mission.

<http://oceanai.mit.edu/pavlab/pmwiki/pmwiki.php?n=TXT.LabIntro>

## 2 Exercises

### 2.1 Exercise 1 - Changing the Alpha Mission to Use the Loiter Behavior

In this exercise the goal is make a version of the Alpha mission and swap out the Waypoint Behavior and use the Loiter Behavior instead. It should look something like:

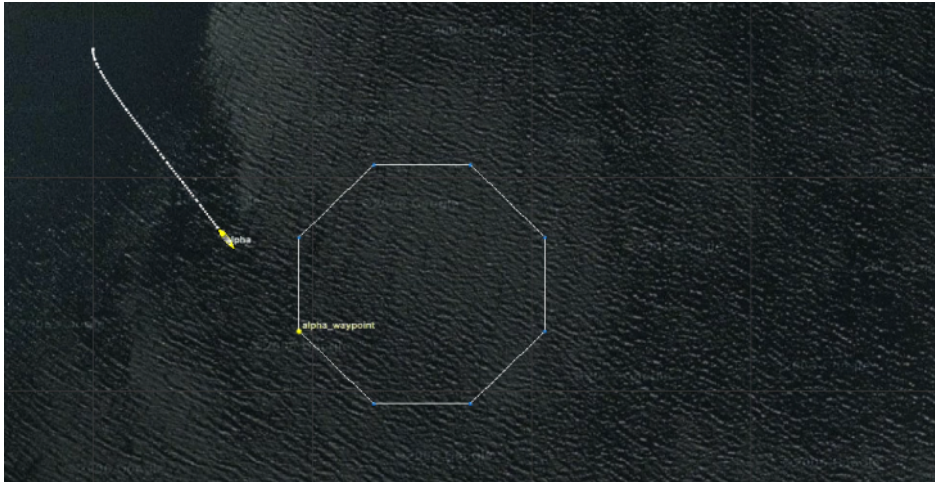


Figure 1: **s8.alpha**: Using the Loiter Behavior

You will need to do the following steps:

- Copy the `s1.alpha` mission, naming it `s8.alpha`
- Remove the Waypoint survey behavior (keep the return waypoint behavior)
- Add a Loiter Behavior

The Loiter behavior documentation is here:

<http://oceanai.mit.edu/ivpman/bhvs/Loiter>

The behavior block should look like that below. You can copy it into your behavior file, but try to understand the configuration parameters by reading the Loiter documentation above.

```
//-----  
Behavior = BHV_Loiter  
{  
  name          = loiter  
  priority      = 100  
  condition     = RETURN = false  
  condition     = DEPLOY = true  
  updates       = UP_LOITER  
  speed         = 1.3  
  clockwise     = false  
  radius        = 6.0  
  slip_radius   = 25.0  
  polygon       = format=radial, x=75, y=-75, radius=30, pts=8, snap=1  
  visual_hints  = nextpt_color=yellow, nextpt_lcolor=khaki  
  visual_hints  = edge_color=white, vertex_color=dodger_blue  
  visual_hints  = edge_size=1, vertex_size=3, label=LOITER_POLYGON  
  visual_hints  = nextpt_vertex_size=5  
}
```

## 2.2 Exercise 2 - Adding Depth to our Missions, Constant Depth Behavior

In this exercise the goal is to modify the previous `s8.alpha` mission to have a vehicle that operates underwater, reasoning about depth in addition to heading and speed. It should look something like:

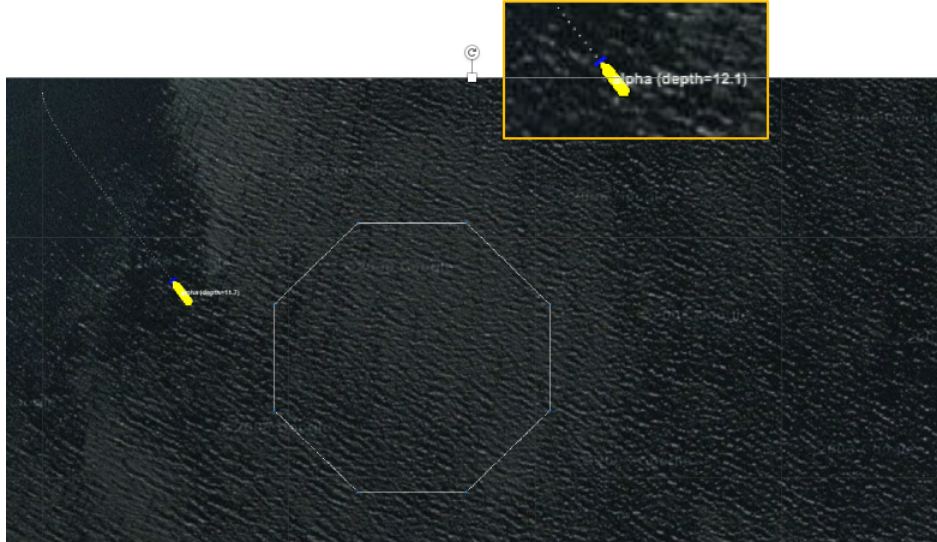


Figure 2: `s9.alpha`: A simulated UUV showing its current depth.

You will need to do the following steps:

- Copy the `s8.alpha` mission, naming it `s9.alpha`
- Configure the Helm to reason about depth
- Configure the simulator to reason about depth
- Configure the PID controller to reason about depth
- Add the `ConstantDepth` Behavior to the behavior file

### 2.2.1 Configure the Helm to Reason about Depth

The Helm documentation is at the link below. In particular, Section 6.4.6 discusses the helm decision space.

<http://oceanai.mit.edu/ivpman>

The helm configuration block should look like that below. You can copy it into your mission file, but try to understand the configuration parameters by reading the documentation.

```

ProcessConfig = pHelmIvP
{
  AppTick      = 4
  CommsTick    = 4

  bhv_dir_not_found_ok = true

  behaviors    = alpha.bhv
  domain       = course:0:359:360
  domain       = speed:0:4:41
  domain       = depth:0:100:101    <-- Add this line
}

```

## 2.2.2 Configure the Simulator to Reason about Depth

The Simulator documentation is at the link below.

<http://oceanai.mit.edu/ivpman/apps/uSimMarine>

The `uSimMarine` configuration block should look like that below. You can copy it into your mission file, but try to understand the configuration parameters by reading the documentation. The last four lines are needed with simulating depth.

```

ProcessConfig = uSimMarine
{
  AppTick      = 4
  CommsTick    = 4

  start_x      = 0
  start_y      = -20
  start_heading = 180
  start_speed   = 0

  prefix       = NAV

  turn_rate    = 40
  thrust_map   = 0:0, 20:1, 40:2, 60:3, 80:4, 100:5
  thrust_reflect = true

  buoyancy_rate      = 0.025
  max_depth_rate     = 5
  max_depth_rate_speed = 2.0
  default_water_depth = 400
}

```

## 2.2.3 Configure the PID Controller to Reason about Depth

You will need to add the below lines to the `pMarinePID` configuration block in your mission file to reason about depth.

```

// Depth control configuration
depth_control      = true  // or {false}
z_to_pitch_pid_kp  = 0.12
z_to_pitch_pid_kd  = 1.0
z_to_pitch_pid_ki  = 0.004
z_to_pitch_pid_integral_limit = 0.05
maxpitch          = 15

// Depth control configuration
pitch_pid_kp       = 0.5
pitch_pid_kd       = 1.0
pitch_pid_ki       = 0
pitch_pid_integral_limit = 0
maxelevator        = 13
}

```

## 2.2.4 Add the ConstantDepth Behavior to the behavior file

The ConstantDepth behavior documentation is at the below URL.

<http://oceanai.mit.edu/ivpman/bhvs/ConstantDepth>

You will need to add a configuration block like that below. You can copy it into your behavior file, but try to understand the configuration parameters by reading the documentation.

```

//-----
Behavior=BHV_ConstantDepth
{
  name      = const_depth
  pwt      = 100
  condition = DEPLOY = true
  duration  = no-time-limit

  depth = 20
}

```



## 2.3 Exercise 3 - Allow the User to Dynamically Change Depth

In this exercise the goal is to modify the previous `s9_alpha` mission to accept user specified changes to the commanded UUV depth, during the mission. The user should be able to toggle between commanded depths of 20 and 40 meters. Two buttons will be added to `pMarineViewer` to initiate the depth changes. It should look something like:

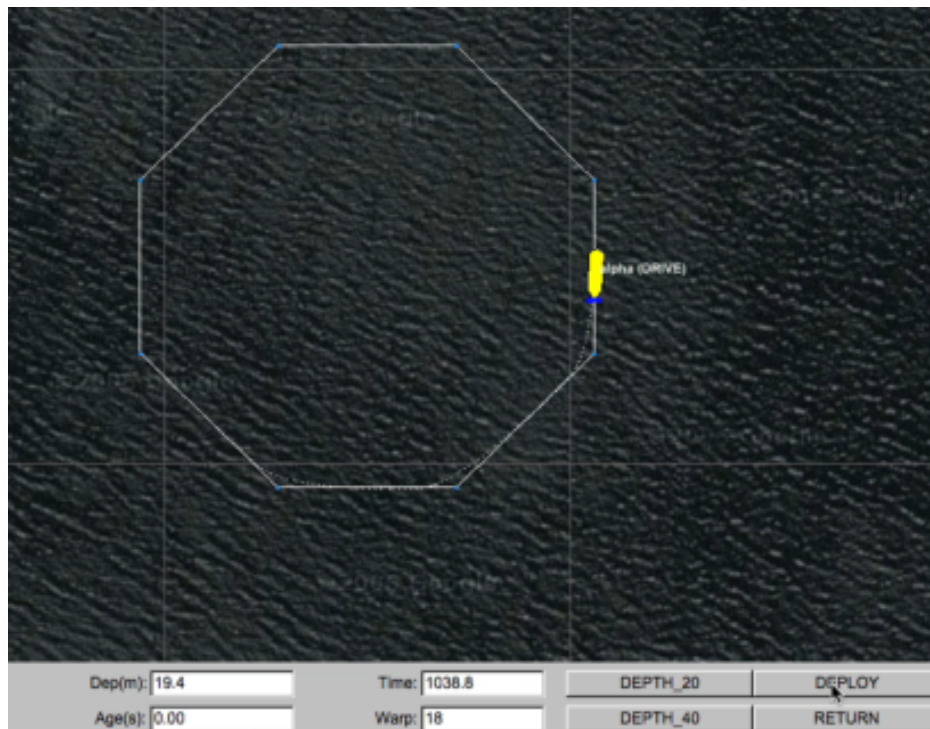


Figure 3: **s10\_alpha**: A simulated UUV with two new operator buttons for changing the depth between 20 and 40 meters.

You will need to do the following steps:

- Copy the `s9_alpha` mission, naming it `s10_alpha`
- Add the `updates` parameter to the `ConstantDepth` behavior
- Add the appropriate buttons to the `pMarineViewer` configuration

### 2.3.1 Add the updates `ConstantDepth` Behavior

The `updates` parameter is defined for all IvP Behaviors. It specifies a MOOS variable from which updates to prior behavior configurations can be applied. Read more here:

[http://oceanai.mit.edu/ivpman/pmwiki/pmwiki.php?n=Helm.HelmBehaviors#sec\\_updates](http://oceanai.mit.edu/ivpman/pmwiki/pmwiki.php?n=Helm.HelmBehaviors#sec_updates)

You will need to add one line to the existing configuration block below:

```
//-----  
Behavior=BHV_ConstantDepth  
{  
  name      = const_depth  
  pwt      = 100  
  condition = DEPLOY = true  
  duration  = no-time-limit  
  updates   = DEPTH_UPDATE  
  
  depth = 20  
}
```

### 2.3.2 Add Buttons to pMarineViewer

The next step is to add a pair of buttons to the `pMarineViewer` configuration block that allow us to command different depths:

The `pMarineViewer` documentation is here (see Sec 47.1.5):

<http://oceanai.mit.edu/ivpman/apps/pMarineViewer>

You will need to add the below line to the existing configuration block below:

```
button_three = DEPTH_20 # DEPTH_UPDATE=depth=20  
button_four  = DEPTH_40 # DEPTH_UPDATE=depth=40
```

## 2.4 Exercise 4 - Use a Script to Randomly Change Depth

In this exercise the goal is to copy the previous `s10_alpha`, to a new mission `s11_alpha`, to use a timer script to randomly change the vehicle depth between 20 and 80 meters.

You will need to do the following steps:

- Copy the `s10_alpha` mission, naming it `s11_alpha`
- Add the `uTimerScript` to the Antler block in the mission file
- Configure the `uTimerScript`

To enable `uTimerScript` to be launched, it needs to be added to the Antler configuration block in `alpha.moos`. Just add the last line as in the example below.

```
//-----  
// Antler configuration block  
ProcessConfig = ANTLER  
{  
  MSBetweenLaunches = 200  
  
  Run = MOOSDB           @ NewConsole = false  
  Run = pLogger          @ NewConsole = false  
  Run = uSimMarine       @ NewConsole = false  
  Run = pMarinePID       @ NewConsole = false  
  Run = pHelmIvP         @ NewConsole = false  
  Run = pMarineViewer    @ NewConsole = false  
  Run = uProcessWatch    @ NewConsole = false  
  Run = pNodeReporter    @ NewConsole = false  
  Run = uTimerScript     @ NewConsole = false  
}
```

The documentation for `uTimerScript` can be found at the below link:

<http://oceanai.mit.edu/ivpman/apps/uTimerScript>

The configuration block should look like that below. You can copy it into your mission file, but try to understand the configuration parameters by reading the documentation.

```
//-----  
// uTimerScript configuration block  
ProcessConfig = uTimerScript  
{  
  AppTick    = 4  
  CommsTick  = 4  
  
  condition  = DEPLOY = true  
  randvar    = varname=RND_DEPTH, min=20, max=80, key=at_reset  
  event      = var=DEPTH_UPDATE, val=depth=${RND_DEPTH}, time=120  
  reset_max  = nolimit  
  reset_time = all-posted  
}
```

## 2.5 Exercise 5 - Use the MaxDepth Behavior to Limit Depth

In this exercise the goal is to extend the previous mission to include a MaxDepth behavior. This behavior will be used to make sure that the maximum command depth will be 50 meters, even though random depths between 20 and 80 meters will continue to be generated by the script.

You will need to do the following steps:

- Copy the s11\_alpha mission, naming it s12\_alpha
- Add a MaxDepth behavior to the behavior file, limiting the maximum commanded depth to be 50 meters
- Ensure the priority weight for this behavior is higher than the ConstantDepth behavior.

The documentation for MaxDepth behavior can be found at the below link:

<http://oceanai.mit.edu/ivpman/bhvs/MaxDepth>

The configuration block should look like that below. You can copy it into your behavior file, but try to understand the configuration parameters by reading the documentation.

```
//-----  
Behavior=BHV_MaxDepth  
{  
  name      = max_depth  
  pwt       = 200  
  condition = DEPLOY = true  
  duration  = no-time-limit  
  max_depth = 50  
  basewidth = 0  
}
```

## 2.6 Exercise 6 - Simulate Surfacing for GPS

In this exercise the goal is to extend the `s9_alpha` mission to have a loitering UUV periodically stop and float to the surface, and weight at the surface for a period of time (presumably to get a GPS fix). Two new behavior instances will be added. Both are Timer behaviors. These behavior do not produce any objective function, no influence over heading, speed or depth decisions. They simply use the built-in timer (duration) feature available to all behaviors, to periodically post end flags.

You will need to do the following steps:

- Copy the `s9_alpha` mission, naming it `s13_alpha`
- Add a Timer behavior to the behavior file. This behavior will be on when (a) the vehicle is deployed (`DEPLOY=true`), and when a GPS fix is not needed (`NEED_GPS=false`). It will have duration of 300 seconds, and when it completes, it will declare that a GPS fix is needed (`NEED_GPS=true`).
- Add a second Timer behavior to the behavior file. This behavior will be on when (a) the vehicle is deployed (`DEPLOY=true`), and when a GPS fix is needed (`NEED_GPS=true`), and when the vehicle is still not yet at the surface (`NAV_DEPTH < 2`). It will have duration of 30 seconds, and when it completes, it will declare that a GPS fix is not needed (`NEED_GPS=false`).
- The behavior file will need to declare that initially a GPS fix is not needed (`initialize NEED_GPS = false`).

The documentation for `MaxDepth` behavior can be found at the below link:

<http://oceanai.mit.edu/ivpman/bhvs/MaxDepth>

The configuration block should look like that below. You can copy it into your behavior file, but try to understand the configuration parameters by reading the documentation.

```
//-----  
Behavior=BHV_MaxDepth  
{  
  name      = max_depth  
  pwt       = 200  
  condition = DEPLOY = true  
  duration  = no-time-limit  
  max_depth = 50  
  basewidth = 0  
}
```

## 2.7 Exercise 7 - Add Simulated Drift to the Mission

In this exercise the goal is to extend the `s13.alpha` mission to have include simulated drift in the simulation

You will need to do the following steps:

- Copy the `s13.alpha` mission, naming it `s14.alpha`
- Add two buttons to the `pMarineViewer` configuration to turn drift on and off. Add a drift at of 0.3 m/sec at heading 45 degrees.
- Note the performance of the Loiter behavior under drift.

The documentation for the `uSimMarine` MOOS App can be found at the below link. The relevant part for this exercise is the drift vector feature. (This is just FYI - no need to modify the simulator in this exercise)

<http://oceanai.mit.edu/ivpman/apps/uSimMarine>

The line in the `pMarineViewer` configuration block should look like that below. You can copy it into your behavior file, but try to understand the configuration parameters by reading the documentation. The last two lines are the key additions for this exercise.

```
button_one = DEPLOY # DEPLOY=true
button_one = MOOS_MANUAL_OVERRIDE=false # RETURN=false
button_two = RETURN # RETURN=true

button_three = DRIFT_ON # DRIFT_VECTOR = 45,0.3
button_four = DRIFT_OFF # DRIFT_VECTOR = 0,0
```

### 3 Where to Find the Solutions

All solutions can be downloaded from the server:

Exercise 1:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s8\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s8_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s8\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s8_alpha/alpha.bhv)

Exercise 2:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s9\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s9_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s9\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s9_alpha/alpha.bhv)

Exercise 3:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s10\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s10_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s10\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s10_alpha/alpha.bhv)

Exercise 4:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s11\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s11_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s11\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s11_alpha/alpha.bhv)

Exercise 5:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s12\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s12_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s12\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s12_alpha/alpha.bhv)

Exercise 6:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s13\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s13_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s13\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s13_alpha/alpha.bhv)

Exercise 7:

- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s14\\_alpha/alpha.moos](http://oceanai.mit.edu/pavlab/pdfs_tx/s14_alpha/alpha.moos)
- [http://oceanai.mit.edu/pavlab/pdfs\\_tx/s14\\_alpha/alpha.bhv](http://oceanai.mit.edu/pavlab/pdfs_tx/s14_alpha/alpha.bhv)